


## IB104

# Clutch to Transmission Housing Interference

Some of these vehicles may be equipped with a ZF factory remanufactured transmission. The transmission identification tag starts with F2TA. These transmission housings have a thicker casting in the clutch housing area than the original transmission. You may need to grind off  $\frac{1}{4}$ " of the air dam at the 7 o'clock area for clutch clearance. This modification can be done by removing the dust cover for access.

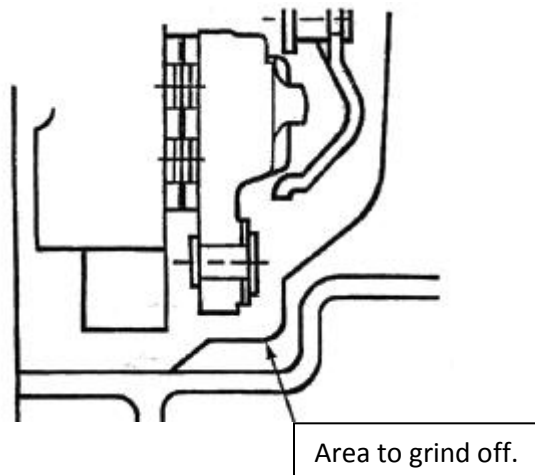

PLEASE REFER TO FACTORY SERVICE MANUALS FOR DETAILED APPLICATION SPECIFIC PROCEDURES.

This bulletin is to assist in the safe and effective servicing of this application. Transmissions, transaxles and transfer cases are heavy and their safe removal and replacement requires the use of proper tools, equipment and procedures to prevent injury and damage. Always read and follow instruction bulletins and factory service manuals for detailed clutch servicing procedures.

Bulletins and any additional information:

[www.clutchtechsupport.com](http://www.clutchtechsupport.com)